



DUST COLLECTION

MAKE DUST HISTORY

PROTECT THE TOOLS
YOU CAN'T REPLACE

SILICOSIS IS 100% PREVENTABLE*



Whether you're concerned about the health of your employees, ensuring OSHA compliance or increasing productivity, Bosch has a PRO+GUARD™ dust solution to meet your needs. Bosch offers proven products like Speed Clean™ dust extraction bits that reduce respirable silica dust particulates while reducing installation time by up to 50 percent.

Visit [boschtools.com/PROGUARD](https://www.boschtools.com/PROGUARD) for more information.



WE'VE GOT YOUR BACK



PRO+GUARD™
PERFORMANCE • COMPLIANCE • SAFETY

Scan this code with your phone for product information, videos and more.

When you're looking for a power tool partner that can help move your organization toward compliance, yet maintain productivity, there's only one choice. The Bosch PRO+GUARD™ dust solution lineup is the largest in the industry, offering peace of mind that you're working with the best tools and technology available.



- ▶ Bosch offers the concrete industry's largest selection of products designed specifically for applications that require dust protection
- ▶ Dust solutions from Bosch offer maximum respirable silica dust removal by applying industry-best technologies
- ▶ Bosch dust solutions are built around best-in-class dust extractors that offer consistent suction to ensure maximum performance and compliance



BOSCH
Invented for life

MAXIMIZE PERFORMANCE AND COMPLIANCE

DUST CONTROL SYSTEMS

A strong system begins with the application. Bosch offers the power tool industry's largest dust solution lineup under the PRO+GUARD™ line.



HIGH PRODUCTIVITY

The key component in an OSHA-compliant dust management system is a professional-grade dust extractor. Bosch dust extractors provide best-in-class CFM (cubic feet per minute) along with high suction power for maximum productivity.



AUTO FILTER CLEANING

Bosch filter technology reverses air flow every 15 seconds to keep the filter clean for longer life.



Move Toward OSHA Compliance with PRO+GUARD™ Dust Solutions



*OSHA Table 1 requires 225 CFM dust extractor for 9 in. guard.

RESPIRATION

Use of a respirator is dependent upon the application and equipment used. Respirators that filter contaminants provide a final line of defense in protecting the user.



CLEAN UP

The OSHA-compliant dust management system ends with a collection bag designed to keep the dust in the bag vs. in the canister. Bosch relies on fleece filter bags to safeguard users from additional silica dust exposure when changing the bag.



BOSCH
Invented for life

AUTOMATIC FILTER-CLEANING DUST EXTRACTOR

WET*/DRY VAC SERIES

DUST COLLECTION



EFFECTIVE DUST EXTRACTION
150 CFM (max.)

POWER TOOL ACTIVATION

ON/OFF SWITCH

AUTOMATIC FILTER CLEANING (AFC)
Every 15 seconds the flat-pleated filter is cleaned through reversed airflow

EASY-TO-CHANGE FLAT FILTERS

POWER BROKER
For allocating power between vacuum and connected power tool; also allows adjustment of suction control for specialty applications

HOSE AND CORD STORAGE

- ▶ Secure vacuum hose wrap
- ▶ Power cord hook

AUTOMATIC FILTER CLEANING

ON/OFF BUTTON

INDICATOR LIGHT

- ▶ No Light = Off
- ▶ Green = On

ROBUST WHEELS

- ▶ Jobsite tested rear wheels
- ▶ Front caster with brake

BOSCH

*Water level sensor for automatic shut off. Do not use HEPA filter for wet vacuuming.



9-GALLON DUST EXTRACTOR WITH AUTO FILTER CLEANING/HEPA FILTER/ FLEECE FILTER BAG

VAC090AH



- ▶ Automatic Filter Cleaning—Cleans filter every 15 seconds to maintain maximum suction power
- ▶ Power Tool Activation—Allows power tool switch to turn vacuum on and off
- ▶ Power Broker Dial—For allocating power between vacuum and connected power tool; also allows suction control for specialty applications
- ▶ Durable Wheels and Casters (One Locking)—Built to withstand the demands of a jobsite

INCLUDES

Fleece Filter Bag **VB090F**
Anti-Static Bend Nozzle **VX100**
10 Ft. Hose **VH1035**
Power Tool Adapter Nozzle **VX120**
HEPA Filter

SPECIFICATIONS

RATING	120V
FREQUENCY	60 Hz
CANISTER VOLUME (GROSS)	9.25
AIR FLOW (MAX.)	150 CFM (70 ltr./sec.)
STATIC WATER LIFT	97"
NO. OF FILTERS	1
SOUND PRESSURE LEVEL	71 db
HOSE LENGTH	10 ft.
HOSE PORT INSIDE DIAMETER	2-1/4"
CORD LENGTH	13 ft.
WEIGHT	28.0 lbs.

14-GALLON DUST EXTRACTOR WITH AUTO FILTER CLEANING/HEPA FILTER/ FLEECE FILTER BAG

VAC140AH



- ▶ Automatic Filter Cleaning—Cleans filter every 15 seconds to maintain maximum suction power
- ▶ Power Tool Activation—Allows power tool switch to turn vacuum on and off
- ▶ Power Broker Dial—For allocating power between vacuum and connected power tool; also allows suction control for specialty applications
- ▶ Metal Frame, Durable Wheels and Casters (One Locking)—Built to withstand the demands of a jobsite

INCLUDES

Fleece Filter Bag **VB140F**
Anti-Static Bend Nozzle **VX100**
10 Ft. Hose **VH1035**
Power Tool Adapter Nozzle **VX120**
HEPA Filter

SPECIFICATIONS

RATING	120V
FREQUENCY	60 Hz
CANISTER VOLUME (GROSS)	14.5
AIR FLOW (MAX.)	150 CFM (70 ltr./sec.)
STATIC WATER LIFT	97"
NO. OF FILTERS	1
SOUND PRESSURE LEVEL	71 db
HOSE LENGTH	10 ft.
HOSE PORT INSIDE DIAMETER	2-1/4"
CORD LENGTH	13 ft.
WEIGHT	38.0 lbs.





The Bosch L-Boxx tool storage system makes organization of additional fleece bags, dust management attachments and personal protective equipment easy. The Bosch Click & Go® system ensures attachment to any Bosch dust extractor is convenient and secure for quick transport.

9-GALLON PRO+GUARD™ DRILLING KIT

GXA3-01L



- ▶ HEPA Filter—Captures 99.97% of particles larger than 0.3 microns
- ▶ Fleece Dust Filter Bag Design—Works as a preliminary filter and a secure way to capture debris and dust to extend the life of the main filter
- ▶ Dust-Extraction Attachment for Concrete Drilling—Optimized for drilling diameters from 5/8 In. to 1-3/8 In.; accommodates up to 2-1/2 In. by removing brush ring
- ▶ Drilling Attachment Dust Port—Fits Bosch 1-3/8 In. vacuum nozzle and can convert to 1-1/4 In./2 In. hose nozzles
- ▶ L-Boxx Dust Extractor Integration—Creates a mobile workstation for easier portability
- ▶ Upgraded One-Click Stacking—Easily lock tool cases together in seconds for secure transport and handling

INCLUDES

HEPA Filter **VF130H**
 (5) 9-Gallon Fleece Filter Bag **VB090F**
 Dust Collection Attachment **HDC200**
 Carrying Case **L-BOXX-3**

Information about L-Boxx storage solutions is available on pages 136–144.

14-GALLON PRO+GUARD™ DRILLING KIT

GXA3-02L



- ▶ HEPA Filter—Captures 99.97% of particles larger than 0.3 microns
- ▶ Fleece Dust Filter Bag Design—Works as a preliminary filter and a secure way to capture debris and dust to extend the life of the main filter
- ▶ Dust-Extraction Attachment for Concrete Drilling—Optimized for drilling diameters from 5/8 In. to 1-3/8 In.; accommodates up to 2-1/2 In. by removing brush ring
- ▶ Drilling Attachment Dust Port—Fits Bosch 1-3/8 In. vacuum nozzle and can convert to 1-1/4 In./2 In. hose nozzles
- ▶ L-Boxx Dust Extractor Integration—Creates a mobile workstation for easier portability
- ▶ Upgraded One-Click Stacking—Easily lock tool cases together in seconds for secure transport and handling

INCLUDES

HEPA Filter **VF130H**
 (5) 14-Gallon Fleece Filter Bag **VB140F**
 Dust Collection Attachment **HDC200**
 Carrying Case **L-BOXX-3**

Information about L-Boxx storage solutions is available on pages 136–144.



9-GALLON PRO+GUARD™ SURFACING KIT

GXA4-01L



- ▶ HEPA Filter—Captures 99.97% of particles larger than 0.3 microns
- ▶ Fleece Dust Filter Bag Design—Works as a preliminary filter and a secure way to capture debris and dust to extend the life of the main filter
- ▶ 16 Ft. Anti-Static Hose—Helps prevent static shock and cling
- ▶ L-Boxx Dust Extractor Integration—Creates a mobile workstation for easier portability
- ▶ Upgraded One-Click Stacking—Easily lock tool cases together in seconds for secure transport and handling

INCLUDES

HEPA Filter **VF130H**
 (5) 9-Gallon Fleece Filter Bag **VB090F**
 16 Ft. Dust Extractor Hose **VH1635A**
 Carrying Case **L-BOXX-4**

Information about L-Boxx storage solutions is available on pages 136–144.

14-GALLON PRO+GUARD™ SURFACING KIT

GXA4-02L



- ▶ HEPA Filter—Captures 99.97% of particles larger than 0.3 microns
- ▶ Fleece Dust Filter Bag Design—Works as a preliminary filter and a secure way to capture debris and dust to extend the life of the main filter
- ▶ 16 Ft. Anti-Static Hose—Helps prevent static shock and cling
- ▶ L-Boxx Dust Extractor Integration—Creates a mobile workstation for easier portability
- ▶ Upgraded One-Click Stacking—Easily lock tool cases together in seconds for secure transport and handling

INCLUDES

HEPA Filter **VF130H**
 (5) 14-Gallon Fleece Filter Bag **VB140F**
 16 Ft. Dust Extractor Hose **VH1635A**
 Carrying Case **L-BOXX-4**

Information about L-Boxx storage solutions is available on pages 136–144.



ATTACHMENTS AND ACCESSORIES FOR VAC SERIES

FILTERS

- ▶ Each fits VAC090A, VAC090AH, VAC090S, VAC140A, VAC140AH and VAC140S dust extractors



VF120H

VF130H

ITEM #	DESCRIPTION
VF100	Flat paper (cellulose) filter
VF110	Flat polyester filter (required for wet vacuuming)
VF120H	Flat HEPA filter
VF130H	Extended life, flat HEPA filter

LOCKING HOSES

- ▶ Each hose fits VAC090A, VAC090AH, VAC090S, VAC140A, VAC140AH and VAC140S dust extractors
- ▶ Not compatible with other dust extractors
- ▶ These hoses connect many Bosch power tools and dust extraction attachments to Bosch VAC series dust extractors
- ▶ VX120 power tool adapter is included
- ▶ Each hose has swivels at both ends
- ▶ Anti-static hoses help prevent static shock and cling



VH1635

VH1635A

ITEM #	DESCRIPTION
VH1635	16 ft., 35mm hose
VH1635A	Anti-static 16 ft., 35mm hose
VH1622A	Anti-static 16 ft., 22mm hose
VH1035	10 ft., 35mm hose
VH1022	10 ft., 22mm hose


POWER TOOL ADAPTER



ITEM #	DESCRIPTION
VX120	Connects VH hoses to tools that have ports for 35mm, 22mm or 19mm hoses. Included with all VH hoses

DISPOSABLE BAGS

- ▶ Each fits VAC090A, VAC090AH, VAC090S, VAC140A, VAC140AH and VAC140S dust extractors
- ▶ A fleece filter bag (VB090F and VB140F) is recommended when using a HEPA filter
- ▶ VB090S is the only bag suited for wet vacuuming
- ▶ VB00P includes attached tie for sealing bag when ready for disposal

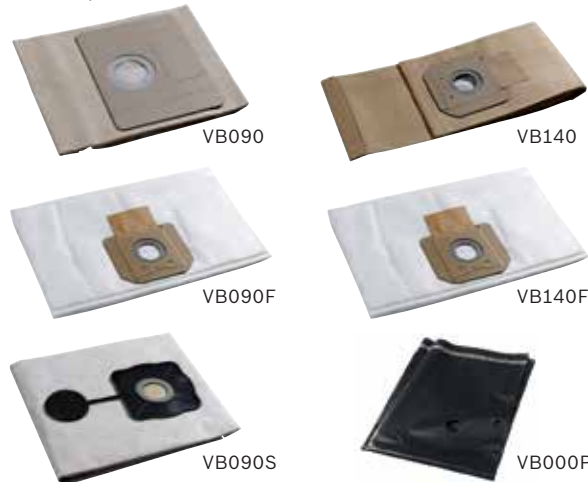

VB090

VB140

VB090F

VB140F

VB090S

VB000P

ITEM #	DESCRIPTION	QUANTITY
VB090	Paper filter bag—9 gal.	5
VB140	Paper filter bag—14 gal.	5
VB090F	Fleece filter bag—9 gal.	5
VB090F-30	Fleece filter bag—9 gal.	30
VB140F	Fleece filter bag—14 gal.	5
VB140F-30	Fleece filter bag—14 gal.	30
VB090S	Wet filter bag—9-14 gal.	5
VB000P	Open-top plastic bag—9-14 gal.	10

BEND/ELBOW

- ▶ Fits VH series hoses
- ▶ Fits VX100 extension tube set and most 35mm and 1-1/2 in. tube sets



ITEM #	DESCRIPTION
VX100	Bend/elbow, anti-static



ATTACHMENTS AND ACCESSORIES FOR 3931 SERIES

AIRSWEEP LOCKING HOSES

- ▶ Connect many Bosch power tools and dust-extraction hood attachments to Bosch 3931-series vacuum cleaners
- ▶ For use only with Bosch 3931-series vacuum cleaners (not compatible with other vacuum cleaners)
- ▶ Anti-static hoses help prevent static shock and cling



ITEM #	DESCRIPTION
VAC006	35mm 5-meter (16.4 ft.)—swivels at both ends of hose
VAC008	Anti-static 35mm 5-meter (16.4 ft.)—swivels at tool end of hose

AIRSWEEP WIRE ATTACHMENT BASKET

- ▶ Fits on the rear of 3931 and 3931A vacuum cleaners



ITEM #	DESCRIPTION
VAC014	Stores Bosch 3931 and 3931A vacuum cleaner attachments

AIRSWEEP VACUUM FILTERS

- ▶ Each pair fits 3931 and 3931A dust extractors (pair of filters required)



VAC012

ITEM #	DESCRIPTION
VAC012	Polyester filters (pair) (required for wet vacuuming)
VAC019	HEPA filters (pair)

DISPOSABLE BAGS

- ▶ Each fits 3931 series dust extractors
- ▶ VAC022 is the only bag suited for wet vacuuming
- ▶ VAC023 includes attached tie for sealing bag when ready for disposal
- ▶ VAC023 requires use of 3931A compatible canister that has air valve



VAC013



VAC022



VAC023

ITEM #	DESCRIPTION	QTY.
VAC013	Fleece filter bag—5.5 gal.	3
VAC022	Wet filter bag—5.5 gal.	5
VAC023	Open-top plastic bag—10 gal.	3

DUST COLLECTION



BOSCH
Invented for life

UNIVERSAL HOSES AND ADAPTERS

HOSE ADAPTERS

ITEM # **DESCRIPTION**
VAC002 Connects 1-1/4" and 1-1/2" hoses to some tools and attachments that have ports for 35mm, 22mm or 19mm hoses



ITEM # **DESCRIPTION**
VAC003 Connects 35mm, 22mm and 19mm hoses to tools that have ports for 1-1/4" hoses



ITEM # **DESCRIPTION**
VAC004 Connects 35mm hoses to tools that have ports for 2-1/2" hoses



ITEM # **DESCRIPTION**
VAC020 Connects 2-1/2" hoses to tools that have ports for 35mm hoses



ITEM # **DESCRIPTION**
VAC024 Connects 1-1/4" and 1-1/2" hoses to tools and attachments that have parts for 35mm, 22mm or 19mm hoses



FRICTION-FIT HOSE

- ▶ Connects many Bosch power tools and dust extraction hood attachments to dust extractors that have openings for standard 2-1/4 In. hoses
- ▶ Standard 2-1/4 In. friction fit

ITEM # **DESCRIPTION**
VAC005 35mm, 16.4 ft. swivels at both ends of hose



DUST COLLECTION

UNIVERSAL NOZZLES

THREE-PIECE FLOOR NOZZLE SET

- ▶ Fits on most 35mm and 1-1/2 In. tubes



ITEM # **# OF PIECES** **INCLUDES**
VX130 3 Floor nozzle set with two inserts (bristles and squeegee)

SIX-PIECE TUBE AND NOZZLE KIT

- ▶ Fits on most 35mm hoses and most 1-1/2 In. vacuum hoses



ITEM # **# OF PIECES** **INCLUDES**
VAC011 6 (2) straight tubes, (1) curved tube, (1) floor nozzle set with three inserts (smooth floor, carpet and squeegee)—VAC016, (1) crevice tool—VAC017, (1) brush—VAC018

STEEL EXTENSION TUBE SET

- ▶ Fits on most 35mm and 1-1/2 In. hoses, bends, nozzles and attachments including VX100 bend



ITEM # **DESCRIPTION**
VX110 Three-piece chrome extension tube (3 ft. total length)

NOZZLES

- ▶ Fits 35mm tubes, hoses and most 1-1/2 In. tubes and hoses



ITEM # **DESCRIPTION**
VAC015 Universal vacuum floor nozzle—for carpet or smooth surfaces
VAC016 Three-piece floor nozzle set (not shown)
VAC017 Vacuum crevice tool—for clean-up in tight spaces
VAC018 Vacuum brush

FILTERS FOR CORDLESS DUST COLLECTION



DF18V-16



VF320H



VF220



VF12V

ITEM #	DESCRIPTION
DF18V-16	Replacement HEPA filter for GDE18V-16 SDS-plus® dust collection attachment (see page 108)
VF320H	Fits GAS18V-3 18V 2.6-gallon wet/dry vacuum cleaner (see page 121)
VF220	Fits GAS18V-02 18V handheld vacuum cleaner (see page 121)
VF12V	Fits VAC120 12V Max cordless vacuum (see page 84)

ATTACHMENTS FOR CORDLESS DUST COLLECTION

WALL MOUNT

► Mounting hardware not included



ITEM #	DESCRIPTION
VX240	Fits GAS18V-02 18V handheld vacuum cleaner (see page 121)



DUST COLLECTION SOLUTIONS

In order to move toward compliancy and protection, it's critical that every component in the system be designed to effectively remove dust. Bosch offers the power tool industry's widest selection of dust management solutions based on application.



DUST COLLECTION

1. CHOOSE THE TOOL THAT BEST FITS YOUR NEEDS



TOOL

Dust collection systems are available for Bosch grinders, hammers and hammer drills, routers, oscillators, jig saws, circular saws, miter saws, table saws, sanders and planers.

2. IDENTIFY THE CORRECT ATTACHMENT THAT FITS YOUR TOOL



ATTACHMENT

Bosch dust collection attachments are custom engineered to provide maximum performance while preserving the full functionality of the tool.

3. CHOOSE A HEPA READY DUST EXTRACTOR WITH THE HIGHEST CFM AND MEETS EPA GUIDELINES



DUST EXTRACTORS

Bosch dust extractors are rated as high as 150 CFM (cubic feet per minute), with some offering features such as HEPA filtration and automatic filter cleaning.

4. DETERMINE THE RESPIRATOR FOR YOUR APPLICATION (REFER TO THE OSHA TABLE 1)*

For suggested respiratory protection and other personal protective equipment, go to 3M.com/OSHASilica

*OSHA Rule 1926.1153 Table 1



APF 10 shown
3M™ Rugged Comfort™
Half Face Respirator
6500 Series

RESPIRATION

Respirators provide protection by filtering contaminants the user breathes. If needed for the application being performed, respirators of this type include particulate respirators, that filter out airborne particles and air-purifying respirators with cartridges/canisters that filter out chemicals and gases.

CONCRETE DUST COLLECTION COMPATIBILITY CHARTS

HAMMERS AND HAMMER DRILLS

IDENTIFY APPLICATION	SMALL DIAMETER DRILLING				LARGE DIAMETER DRILLING			CHIPPING & DEMOLITION	
	SDS-plus® Rotary Hammers / Round Shank Hammer Drills				SDS-max® & Spline Rotary Hammers			SDS-max® & Spline Rotary / Demo Hammers	1-1/8" Hex Breaker Hammers
TOOLS									
18V	GBH18V-26 + GDE18V-16	RHH181, GBH18V-20, GBH18V-26	RHH181, GBH18V-20, GBH18V-26	RHH181, GBH18V-20, GBH18V-26	–	–	–	–	–
36V	–	RH328VC-36K	RH328VC-36K	RH328VC-36K	–	–	–	–	–
CORDED	–	11250VSR, 11253VSR, GBH2-26, 11255VSR, RH228VC, GBH2-28L, RH328VC/VCQ, RH432VCQ	11250VSR, 11253VSR, GBH2-26, 11255VSR, RH228VC, GBH2-28L, RH328VC/VCQ,	11250VSR, 11253VSR, GBH2-26, 11255VSR, RH228VC, GBH2-28L, RH328VC/VCQ, RH432VCQ	SDS-max® Rotary: RH540M, 11264EVS, RH745, RH850VC, RH1255VC Spline Rotary: RH540S, 11265EVS			SDS-max®/ Spline Rotary Hammers used in "Demo only" mode SDS-max® Demo: DH507, 11321EVS, DH712VC, 11316EVS, DH1020VC	11335K, BH2760VCB, BH2770VCD
ROUND SHANK HAMMER DRILLS –18V	–	–	–	HDS181A, HDS183, HDH181, HDH183	–	–	–	–	–
ROUND SHANK HAMMER DRILLS –CORDED	–	–	–	1191VSR, HD18-2, HD19-2, HD21-2	–	–	–	–	–
ATTACHMENT/ SHROUD									
MODELS	GDE18V-16	SDS-plus® Speed Clean™	HDC100	HDC200	Speed Clean™ SDS-max®	HDC200	HDC250	HDC300	HDC400
DUST EXTRACTORS (REQUIREMENTS PER OSHA SILICA TABLE 1)	Bosch VAC090AH / VAC140AH (150 CFM)								
RESPIRATION** (BASED ON OSHA SILICA TABLE 1)	None							Indoors: always needed Outdoors: needed when used > 4 hours	

DUST COLLECTION



HOSE PORT ADAPTERS

- ▶ Connects various vacuum hose diameters to Bosch tool dust ports

HOSE DIAMETER	ADAPTER
2-1/2" HOSES	VAC020 adapter
1-1/4" OR 1-1/2" HOSES	VAC002 or VAC024 adapter
35MM	No adapter required

*Certification Letters are available for use with Bosch 150CFM Dust Extractors, see Boschtools.com for details

















**See Bosch PRO+GUARD™ Dust Brochure and 3M.com/OSHASilica for details



BOSCH
Invented for life

GRINDERS

DUST COLLECTION

IDENTIFY APPLICATION	5" TUCKPOINT GRINDING	5" SURFACE GRINDING	5" / 6" CONCRETE CUTTING		7" SURFACE GRINDING	7" / 9" CUTTING		12" CUTTING	
TOOLS									
	AG50-10TG 1775E	CSG15 1773A	4-1/2-6" Grinders	4-1/2-5" Grinders	6" Grinder	7 or 9" Grinders	7" Grinder only	9" Grinder only	12" Cutoff only
CORDED	—	—	1800 Series, AG40 Series, AG50 Series, GWS10 Series, GWS13 Series	1800 Series, AG40 Series, AG50 Series, GWS10 Series, GWS13 Series	1800 Series, AG60 Series, GWS13 Series	1800 Series, 1900 Series	1800 Series, 1900 Series	1800 Series, 1900 Series	1364
18V	—	—	GWS18V-45C, GWS18V-45PC, GWS18V-45PSC	GWS18V-45PC	—	—	—	—	—
ATTACHMENT/SHROUD		N/A							
MODELS	TG502* (not for 1775E)	—	18SG-5E	GA50DC - 5" 18DC-5E - 5"	18DC-6E - 6"	18SG-7*	19DC-7*	19DC-9*	1605510215*
DUST EXTRACTORS (REQUIREMENTS PER OSHA SILICA TABLE 1)	Bosch VAC090AH / VAC140AH (150 CFM)								
RESPIRATION** (BASED ON OSHA SILICA TABLE 1)	Always needed		Indoors: always needed Outdoors: needed when used > 4 hours						

* For tuckpointing applications TG502 may also be used with the following Bosch grinders: 1800 Series, AG40 Series, AG50 Series, GWS10 Series, GWS13-50 Series

HOSE PORT ADAPTERS

► Connects various vacuum hose diameters to Bosch tool dust ports

HOSE DIAMETER	ADAPTER
2-1/2" HOSES	VAC020 Adapter
1-1/4" OR 1-1/2" HOSES	VAC002 or VAC024 Adapter
35MM	No adapter required









*Certification Letters are available for use with Bosch 150CFM Dust Extractors, see Boschtools.com for details

**See Bosch PRO+GUARD™ Dust Brochure and 3M.com/OSHASilica for details

† OSHA Silica Table 1 states high CFM dust extractors are required

WOOD DUST COLLECTION COMPATIBILITY CHARTS

ROUTERS

STEP	PALM ROUTERS AND BASE	PALM ROUTERS COMBO AND PLUNGE BASE	FIXED-BASE ROUTERS AND BASES	ROUTER COMBO PACKS AND PLUNGE BASE	FIXED-BASE ROUTER AND BASE	ROUTER COMBO PACK, PLUNGE ROUTER AND BASE	PLUNGE BASE ROUTER	ROUTER TABLES
1. IDENTIFY TOOL	 PR10E, PR20EVS, PR001	 PR20EVSPK, PR011, GKF125CEPK, PR111	 1617, 1617EVS, 1618, 1618EVS, RA1160, RA1161, RA1162, RA1164, RA1165	 1617PK, 1617EVSPK, RA1166	 MRF23EVS, MRF01	 MRC23EVSK, MRP23EVS, MRP01	 1619EVS**	 RA1171, RA1180, RA1181, RA1182, RA1200
2. SELECT ATTACHMENT	PR007 [†]	PR012 [†] , RA1175 [†] or RA1054 [†]	RA1172AT [†] or RA1054 [†]	RA1173AT [†] or RA1054 [†]	RA1176AT [†] or RA1054 [†]	RA1177AT [†] or RA1054 [†]	RA1175 [†] or RA1054 [†]	Not Required
3. DETERMINE VAC HOSE DIAMETER#	4. Select Hose Adapter							
19mm / 22mm	X	X	X	X	X	X	X	X
35mm	Not Required	Not Required	Not Required	Not Required	Not Required	Not Required	Not Required	VAC004
1-1/4" / 1-1/2"	VAC002 or VAC024	VAC002 or VAC024	VAC002 or VAC024	VAC002 or VAC024	VAC002 or VAC024	VAC002 or VAC024	VAC002 or VAC024	X
2-1/2"	VAC020	X	VAC020	VAC020	VAC020	VAC020	VAC020	Not Required






[†] Includes VAC002 for use with 1-1/4" and 1-1/2" hoses
^{*} Includes Dust Hood 2608190039 (standard equipment)

[#] Diameter of hoses only, not the diameter of hose nozzle
 X Hose size is not recommended for tool

DUST COLLECTION



OSCILLATORS (FOR SANDING OPERATIONS ONLY) AND PLANERS

STEP	OSCILLATING TOOLS			PLANERS	12 MAX PLANER
1. IDENTIFY TOOL	 MX25E, PS50	 MX30E	 GOP55-36, GOP12V-28, GOP18V-28, GOP40-30, MX30E, MXH180	 1594, 3365, 53518, 53514, PL1682, PLH181, PL1632, PL2632	 GHO12V-08
2. SELECT ATTACHMENT	OSC002**	OSC003** or OSC005**	OSC005**	Not Required	1600A012LX▲
3. DETERMINE VAC HOSE DIAMETER#	4. Select Hose Adapter				
19mm / 22mm	Not Required	Not Required	Not Required	X	X
35mm	Not Required	Not Required	Not Required	Not Required	Not Required
1-1/4" / 1-1/2"	VAC024	VAC024	VAC024	VAC002 or VAC024	VAC024 (not VAC002)
2-1/2"	X	X	X	VAC020 or 2605702022	X

X Hose size is not recommended for tool

** Includes VAC024 for use with 1-1/4" and 1-1/2" hoses

Diameter of hoses only, not the diameter of hose nozzle

▲ Included with planer

DUST COLLECTION

JIG SAWS AND CIRCULAR SAWS







STEP	JIG SAWS					CIRCULAR SAWS
1. IDENTIFY TOOL	 JS572E, JS572EB	 1590EVS, 1591EVS	 JS470E, JS470EB	 JS365	 JS5	 CS10, CS20
2. SELECT ATTACHMENT	JA1012**	JA1005†	JA1007**	JA1009**	Not Required	CSDCHUTE
3. DETERMINE VAC HOSE DIAMETER#	4. Select Hose Adapter					
19mm / 22mm / 35mm	Not Required	Not Required	Not Required	Not Required	Not Required	Not Required
1-1/4" / 1-1/2"	VAC024 (not VAC002)	VAC002 or VAC024	VAC024 (not VAC002)	VAC024 (not VAC002)	VAC024 (not VAC002)	VAC002 or VAC024
2-1/2"	X	X	X	X	X	VAC020

† Includes VAC002 for use with 1-1/4" and 1-1/2" hoses

** Includes VAC024 for use with 1-1/4" and 1-1/2" hoses

Diameter of hoses only, not the diameter of hose nozzle





X Hose size is not recommended for tool

STEP	FINISHING SANDERS		RANDOM ORBIT SANDERS		BELT SANDERS	DETAIL SANDER
1. IDENTIFY TOOL	 1297, 1293D	 OS50VC, GSS20-40	 1295D, 1295DH, 1295DVS, 3107DVS, 3725DEVS**, 3725DVS, 3727DEVS**, 3727DVS	 1250DEVS, 1370DEVS, ROS10*, ROS20VS*, ROS65VC**	 1274DVS*, 1275DVS, 1276D, 1276DVS, 1278VS	 1294VS
2. SELECT ATTACHMENT	RS006	Not Required	RS006	Not Required	Not Required	Not Required
3. DETERMINE VAC HOSE DIAMETER#	4. Select Hose Adapter					
OPTIONAL ADAPTERS	19mm / 22mm	Not Required	Not Required	Not Required	Not Required	Not Required
	35mm	Not Required	Not Required	Not Required	Not Required	Not Required
	1-1/4" / 1-1/2"	VAC002 or VAC024	VAC024 (not VAC002)	VAC002 or VAC024	VAC002 or VAC024	VAC002 or VAC024
	2-1/2"	X	X	X	X	X

** 3725DEVS and 3727DEVS now include RS006 and VAC002
 † Includes VAC002 adapter
 †† Includes VAC024 for use with 1-1/4" and 1-1/2" hoses

Diameter of hoses only, not the diameter of hose nozzle
 X Hose size is not recommended for tool

MITER SAWS AND TABLE SAWS

STEP	MITER SAWS			TABLE SAWS	
1. IDENTIFY TOOL	 3912, 3915, 4412, 5312, 5412, 5412L	 4212, 4212L, 4405, 4310, 4410, 4410L	 GCM12SD, CM12, CM12SD, CM10GD, CM8S	 4000, 4100, GTS1031, GTS1041A	
2. SELECT ATTACHMENT	Not Required	Not Required	Not Required	Not Required	
3. DETERMINE VAC HOSE DIAMETER#	4. Select Hose Adapter				
	19mm / 22mm	VAC003	VAC004	Not Required	X
	35mm	VAC003	VAC004	Not Required	VAC004
	1-1/4" / 1-1/2"	Not Required	VAC004 and VAC002 or VAC024	VAC002 or VAC024	X
	2-1/2"	VAC003 and VAC020	Not Required	VAC020	Not Required

Diameter of hoses only, not the diameter of hose nozzle
 X Hose size is not recommended for tool




BOSCHTOOLS.COM/PROGUARD AVAILABLE ANYTIME, ANYWHERE ON ANY DEVICE

- ▶ The latest, up-to-date product information and specifications
- ▶ OSHA regulation overview and silica insights
- ▶ Connect with Customer Service via text, email or phone
- ▶ Access where-to-buy information easily



DUST COLLECTION
CAPABILITY CHARTS

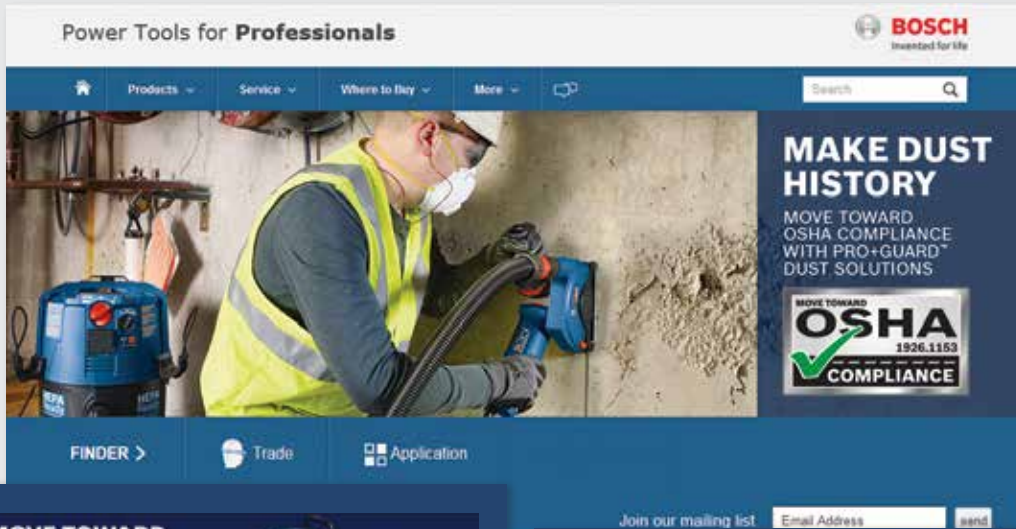

MOVE TOWARD COMPLIANCE

Largest selection of dust solutions by application
Most dust removal per application
Real-time dust extraction

CHOOSING THE RIGHT SYSTEM

- 1 Choose the tool
- 2 Identify compatible attachment or accessory
- 3 Choose a HEPA rated dust extractor with enough CFM to meet EPA guidelines
- 4 Determine the respirator for your application (refer to OSHA Table 1)*

APPLICATION SOLUTIONS

- ▶ Masonry/Tuckpointing
- ▶ Concrete Drilling
- ▶ Concrete Chiseling/Demolition
- ▶ Concrete Surface Grinding
- ▶ Concrete Cutting

Join our mailing list.

PRO+GUARD™ Dust Solutions Video Gallery

SILICA DUST RESOURCES

- Dangers of Silica Exposure
- OSHA Silica Dust Regulations
- 3M Respiration Solutions
- OSHA Compliance Certification Letters
- Silica & OSHA References

DOWNLOAD THE PRO+GUARD™ REFERENCE GUIDE

AVAILABLE RESOURCES

- ▶ About Silica Dust
- ▶ Silica Dust Regulation
- ▶ Respiration Solutions
- ▶ Certification Letters
- ▶ Silica and OSHA References

CONNECT WITH US

